




MIG TORCHES AND ACCESSORIES

INDEX

DESCRIPTION	PAGE
TAURUS BZ TORCH DIAGRAM	3
TAURUS BZ PRO TORCHES	4
TAURUS BZ TORCH CONSUMABLES	5 - 9
TAURUS BZ TORCH ACCESSORIES	10 - 12
TAURUS TW TORCH DIAGRAM	13
TAURUS TW TORCHES	14
TAURUS TW TORCH CONSUMABLES	15 - 17
TAURUS TW TORCH ACCESSORIES	18
TAURUS XP TORCH DIAGRAM	19
TAURUS XP TORCHES	20
TAURUS XP TORCH CONSUMABLES	21 - 23
TAURUS XP TORCH ACCESSORIES	24
TAURUS PP TORCH (PUSH PULL)	25
TAURUS MIG TORCH TOOLS	26

TAURUS BZ MIG TORCH DIAGRAM

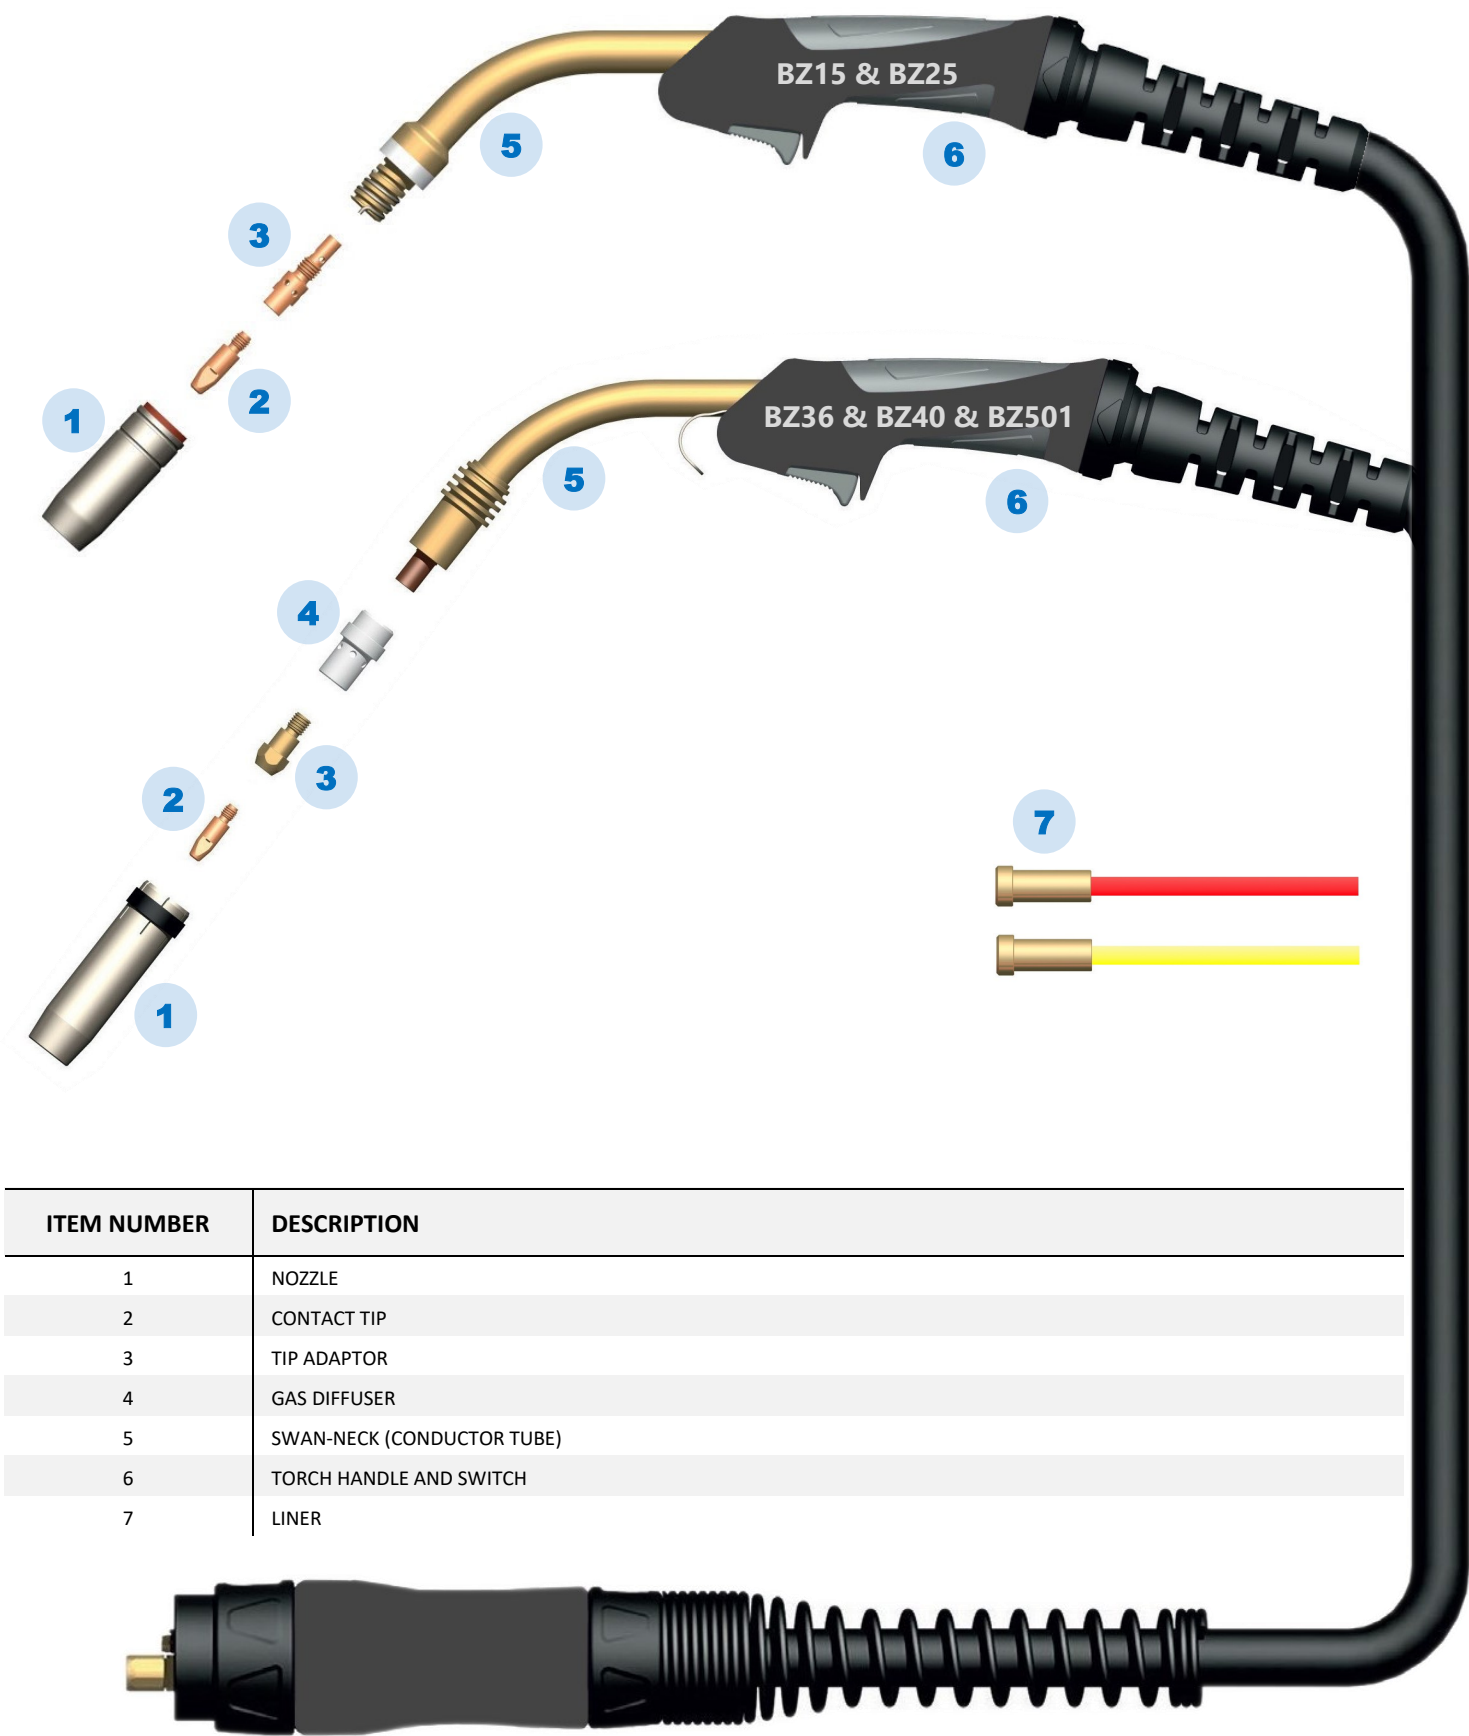

ITEM NUMBER	DESCRIPTION
1	NOZZLE
2	CONTACT TIP
3	TIP ADAPTOR
4	GAS DIFFUSER
5	SWAN-NECK (CONDUCTOR TUBE)
6	TORCH HANDLE AND SWITCH
7	LINER



TAURUS BZ PRO MIG TORCHES



Taurus BZ PRO MIG torches are precision engineered and manufactured from high-quality material offering the user a superior, well-designed, comfortable-to-use product which improves user performance. Nozzle walls are thicker which enhance longevity and superior performance. Contact tips are manufactured from a high-quality, harder than normal copper alloy which delivers excellent conductivity. The swan neck is durable, robust and is manufactured from a high temperature resistant material reducing the risk of shorting. The neck security block inside the handle prevents any rotational neck movement. The torches are fitted with a euro connector which is compatible with most MIG welding machines.

General checklist to assist with the selection of a MIG torch:

- Ensure the torch length is appropriate for the welding operation.
- Confirm that the torch connection will fit directly onto the machine.
- Ensure the correct sized tip and liner is used for the welding wire size.
- The appropriate liner should be used for the filler wire material type.
- Ensure that the correct torch amperage for the application is available.
- Confirm that the duty cycle of the MIG torch selected is suitable for the application.

PRODUCT CODE	DESCRIPTION	TORCH	AMPERAGE	LENGTH
BZ15.3M	TAURUS PRO BZ15 MIG TORCH X 3M	BZ15	150A	3m
BZ15.4M	TAURUS PRO BZ15 MIG TORCH X 4M	BZ15	150A	4m
BZ25.3M	TAURUS PRO BZ25 MIG TORCH X 3M	BZ25	250A	3m
BZ25.4M	TAURUS PRO BZ25 MIG TORCH X 4M	BZ25	250A	4m
BZ25.5M	TAURUS PRO BZ25 MIG TORCH X 5M	BZ25	250A	5m
BZ36.3M	TAURUS PRO BZ36 MIG TORCH X 3M	BZ36	360A	3m
BZ36.4M	TAURUS PRO BZ36 MIG TORCH X 4M	BZ36	360A	4m
BZ36.5M	TAURUS PRO BZ36 MIG TORCH X 5M	BZ36	360A	5m
BZ40.4M	TAURUS PRO BZ40 MIG TORCH X 4M	BZ40	400A	4m
BZ40.5M	TAURUS PRO BZ40 MIG TORCH X 5M	BZ40	400A	5m
BZ501.3M	TAURUS PRO BZ501 MIG TORCH X 3M	BZ501	500A	3m
BZ501.4M	TAURUS PRO BZ501 MIG TORCH X 4M	BZ501	500A	4m
BZ501.5M	TAURUS PRO BZ501 MIG TORCH X 5M	BZ501	500A	5m
BZ61.4M	TAURUS PRO BZ61 MIG TORCH X 4M	BZ501	500A	4m



TAURUS BZ CONTACT TIPS



BZ15



M6



M8/M10

Taurus BZ contact tips are manufactured from a hard and highly-conductive copper alloy. The higher copper alloy quality requires less frequent replacements which in turn saves on welder's downtime and consumable costs. Contact tips are one of the consumables needing frequent replacement on a MIG torch. They are responsible for guiding the welding wire and transferring the current from the swan neck (conductor tube) through the MIG wire to the work piece. It is important to choose a correct size contact tip for the welding application to ensure the best welding performance. Using an incorrect tip size that is too big or too small can create problems such as micro-arcing, overheating, friction and wire jamming, all of which can lead to wire burn-back. Copper is naturally soft and when combined with heat and wire friction can lead to contact tip deformation. This in turn can lead to arc-start issues, burn-back and poor welds such as a lack of penetration. Contact tips need to be changed on a regular basis.

PRODUCT CODE	DESCRIPTION	TORCH	SIZES mm
BZ15-0.6 to BZ15-1.2	BZ15 CONTACT TIP TAURUS BZ CONTACT TIP M6 BZ15	BZ15	0.6 + 0.8 + 0.9 + 1.0 + 1.2
M6-0.8 to M6-1.60	M6 CONTACT TIP TAURUS BZ CONTACT TIP M6 BZ25 / BZ36	BZ25 + BZ36	0.8 + 0.9 + 1.0 + 1.2 + 1.4 + 1.6
M8-0.8 to M8-2.00	M8 CONTACT TIP TAURUS BZ CONTACT TIP M8 BZ40 / 501 - 0.8MM	BZ36 + BZ40 + BZ501	0.8 + 0.9 + 1.0 + 1.2 + 1.4 + 1.6 + 1.8 + 2.0
M10-1.20 to M10-3.20	M10 CONTACT TIP TAURUS BZ CONTACT TIP M10 BZ61	BZ61	1.2 + 1.4 + 1.6 + 2.0 + 2.4 + 2.8 + 3.2





BZ15



BZ25



BZ36



BZ40



BZ501




BZ61

Taurus BZ MIG nozzles are precision engineered with a thicker wall offering superior performance and longevity. The nozzle (also known as a shroud) keeps the gas at the weld puddle. When nozzle spatter builds up or when the nozzle is damaged due to misuse, wear and tear, or overheating, it can result in an uncontrolled shielding process which, in turn, may result in poor welding results, lack of penetration or increased spatter. Spatter build-up between the contact tip and the nozzle can result in shorting. The removal of spatter can be facilitated by using silicon anti-spatter spray. Spatter build-up can also be removed by using a wire brush after removal of the nozzle from the torch.

PRODUCT CODE	DESCRIPTION	TORCH	STYLE
02.02.15CO	TAURUS BZ 15 CONICAL NOZZLE	BZ15	CONICAL
02.02.15P	TAURUS BZ 15 SPOT NOZZLE	BZ15	SPOT
02.02.25CO	TAURUS BZ 25 CONICAL NOZZLE	BZ25	CONICAL
02.02.36CO	TAURUS BZ 36 CONICAL NOZZLE	BZ36	CONICAL
02.02.40CO	TAURUS BZ 40 CONICAL NOZZLE	BZ40	CONICAL
02.02.501.16	TAURUS BZ 501 CONICAL NOZZLE	BZ501	CONICAL
02.02.61CO	TAURUS BZ 61 CONICAL NOZZLE	BZ61	CONICAL



TAURUS BZ GAS DIFFUSERS & TIP ADAPTORS

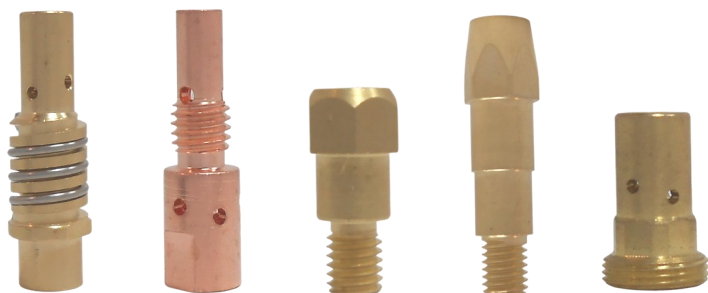

BZ15

BZ25

BZ36

BZ40

BZ501

TIP ADAPTORS

Taurus BZ36, BZ40 and BZ501 tip adaptors holds the contact tip and gas diffuser in place. Taurus BZ15 and BZ25 have combined contact tip and gas diffuser units.



BZ36

BZ40

BZ501

GAS DIFFUSERS

Taurus gas diffusers provide gas flow to the weld pool.

PRODUCT CODE	DESCRIPTION	TORCH	CONTACT TIP THREAD
TIP ADAPTOR			
02.05.15	TAURUS BZ 15 GAS DIFFUSER & TIP ADAPTOR	BZ15	M6
02.03.25M6	TAURUS BZ 25 GAS DIFFUSER & TIP ADAPTOR M6	BZ25	M6
02.03.25M8	TAURUS BZ 25 GAS DIFFUSER & TIP ADAPTOR M8	BZ25	M8
02.03.36M6	TAURUS BZ 36 TIP ADAPTOR M6	BZ36	M6
02.03.36M8	TAURUS BZ 36 TIP ADAPTOR M8	BZ36	M8
02.03.40	TAURUS BZ 40 TIP ADAPTOR M8	BZ40	M8
02.05.501C	TAURUS BZ 501 TIP ADAPTOR M8	BZ501	M8
02.03.61	TAURUS BZ61 M10 TIP ADAPTOR	BZ61	M10
SPRING			
02.05.15.01	TAURUS BZ 15 SPRING FOR TIP ADAPTOR	BZ15	-
02.05.25.01	TAURUS BZ 25 SPRING FOR TIP ADAPTOR	BZ25	-
GAS DIFFUSER			
02.05.36	TAURUS BZ 36 GAS DIFFUSER	BZ36	-
02.05.40	TAURUS BZ 40 GAS DIFFUSER	BZ40	-
02.05.501	TAURUS BZ 501 GAS DIFFUSER	BZ501	-
02.05.61	TAURUS BZ61 GAS DIFFUSER	BZ61	-



TAURUS BZ LINER & LINER NUT



LINERS

The Taurus BZ liner is the guide for the welding wire through the MIG torch to the contact tip. The correct liner is required to ensure smooth, consistent wire feed and high-quality welding. Several criteria such as wire thickness, torch length and type of wire material should be considered when selecting the correct liner. When the internal diameter of the liner is too small for the wire being used, wire feed will be affected. When the internal diameter of the liner is too large for the wire being used, the wire could fold back. When thinner wire is used, erratic feeding or even blockages can occur. Liners need to be cut to the correct length when installed. Wire feeding problems can result from liners cut too short. Liners should fit tightly against the contact tip. The correct liner should be selected for the type of welding wire used - steel liners for mild steel wires. Aluminium alloy wires require smoother teflon liners and for stainless steel wires harder carbon-teflon liners are required. Regular cleaning of liners is necessary to prevent clogging. Due to friction, liners do wear out and should be replaced periodically.

LINER NUT

The BZ liner nut secures the liner in the torch.

PRODUCT CODE	DESCRIPTION	LINER TYPE	LENGTH (m)	WIRE SIZE (mm)
STEEL LINER				
02.04.B4	TAURUS BLUE PVC LINER 0.6 - 0.9MM WIRE - 4.4M	PVC STEEL LINER	4.4	0.6 - 0.9
02.04.R4 + 02.04.R5	TAURUS LINER PVC RED 1.0 - 1.2MM WIRE - 4.4M	PVC STEEL LINER	4.4	1.0 - 1.2
02.04.P4 + 02.04.P6	TAURUS LINER PVC YELLOW 1.2 - 1.6MM WIRE - 4.4M	PVC STEEL LINER	5.4	1.2 - 1.6
02.04.501N4 + 02.04.501N5	TAURUS BARE BZ 501 LINER 1.2 - 1.6MM WIRE - 4M	STEEL LINER	4.4	1.2 - 1.6
02.04.61N4	TAURUS BARE BZ61 LINER 2.4MM - 4M	STEEL LINER	5.4	2.4
TEFLON LINER				
02.04.ALU-4.4M-0.9 to 02.04.ALU-5.4M-1.6	TAURUS TEFLON LINERS FOR ALUMINIUM WIRE	TEFLON LINER	3	1.6 - 2.5
02.04.SS-4.4M-0.9 to 02.04.SS-10M-1.6	TAURUS TEFLON LINERS FOR STAINLESS STEEL WIRE	TEFLON LINER	4	1.6 - 2.5
02.04.BNL-0.8-1.2MM	TAURUS BRONZE NECK LINER FOR TEFLON/CARBON TEFLON LINER	NECK LINER		0.8 - 1.2
02.04.BNL-1.2-1.6MM	TAURUS BRONZE NECK LINER FOR TEFLON/CARBON TEFLON LINER	NECK LINER		1.2 - 1.6
LINER NUT				
02.30.06	LINER NUT	TORH ADAPTOR TYPE EURO	-	-



TAURUS BZ LINER REFERENCE CHART



CODE	LINER TYPE	LENGTH	WIRE SIZE	WIRE TYPE	BZ15	BZ25	BZ36	BZ40	BZ501	BZ61
02.04.B4	STEEL	5.4m	0.6 - 0.9	STEEL WIRES	●	●	○	○	○	○
02.04.R4	STEEL	4.4m	1.0 - 1.2	STEEL WIRES	●	●	●	○	○	○
02.04.R5	STEEL	5.4m	1.0 - 1.2	STEEL WIRES	●	●	●	○	○	○
02.04.P4	STEEL	4.4m	1.2 - 1.6	STEEL WIRES	○	○	○	●	○	○
02.04.P6	STEEL	5.4m	1.2 - 1.6	STEEL WIRES	○	○	○	●	○	○
02.04.501N4	STEEL	4m	1.2 - 1.6	STEEL WIRES	○	○	○	○	●	○
02.04.501N5	STEEL	5m	1.2 - 1.6	STEEL WIRES	○	○	○	○	●	○
02.04.61N4	STEEL		2.4	STEEL WIRES	○	○	○	○	○	●
02.04.ALU-4.4M-0.9	TEFLON	4.4m	0.8 - 0.9	SOFT WIRES	●	●	○	○	○	○
02.04.ALU-4.4M-1.2	TEFLON	4.4m	1.0 - 1.2	SOFT WIRES	●	●	●	○	○	○
02.04.ALU-4.4M-1.6	TEFLON	4.4m	1.2 - 1.6	SOFT WIRES	○	○	○	●	●	●
02.04.ALU-5.4M-0.9	TEFLON	5.4m	0.8 - 0.9	SOFT WIRES	●	●	○	○	○	○
02.04.ALU-5.4M-1.2	TEFLON	5.4m	1.0 - 1.2	SOFT WIRES	●	●	●	○	○	○
02.04.ALU-5.4M-1.6	TEFLON	5.4m	1.2 - 1.6	SOFT WIRES	○	○	○	●	●	●
02.04.SS-4.4M-0.9	CARBON TEF-LON	4.4m	0.8 - 0.9	SOFT STEEL WIRES	●	●	○	○	○	○
02.04.SS-4.4M-1.2	CARBON TEF-LON	4.4m	1.0 - 1.2	SOFT STEEL WIRES	●	●	●	○	○	○
02.04.SS-4.4M-1.6	CARBON TEF-LON	4.4m	1.2 - 1.6	SOFT STEEL WIRES	○	○	○	●	●	●
02.04.SS-5.4M-0.9	CARBON TEF-LON	5.4m	0.8 - 0.9	SOFT STEEL WIRES	●	●	○	○	○	○
02.04.SS-5.4M-1.2	CARBON TEF-LON	5.4m	1.0 - 1.2	SOFT STEEL WIRES	●	●	●	○	○	○
02.04.SS-5.4M-1.6	CARBON TEF-LON	5.4m	1.2 - 1.6	SOFT STEEL WIRES	○	○	○	●	●	●
02.04.SS-10M-1.6	CARBON TEF-LON	10m	1.2 - 1.6	SOFT STEEL WIRES	○	○	○	●	●	●

● Solid means recommended

○ Clear means compatible



TAURUS BZ SWAN-NECKS, TORCH HANDLES & SWITCHES



SWAN-NECKS

The Taurus swan-neck is the extension fitted to the torch handle. The contact tip and gas shroud are mounted on the swan-neck which delivers the electrical current , filler wire and shielding gas to the weld pool.



BZ MIG TORCH HANDLES

The Taurus BZ MIG torch handle is manufactured from fully insulated nylon material suited for heavy-duty welding. The ergonomically designed handle fits comfortably in the hand palm and lessens operator fatigue. The switch is long lasting and designed for frequent activation.

PRODUCT CODE	DESCRIPTION	TORCH
	SWAN-NECK	
02.06.15-PRO	TAURUS BZ 15 SWAN-NECK - PRO	BZ15
02.06.25-PRO	TAURUS BZ 25 SWAN-NECK - PRO	BZ25
02.06.25-FX	TAURUS BZ 25 SWAN-NECK - FLEX NECK	BZ25
02.06.36-PRO	TAURUS BZ 36 SWAN-NECK - PRO	BZ36
02.06.40-PRO	TAURUS BZ 40 SWAN-NECK - PRO	BZ40
02.06.501-PRO	TAURUS BZ 501 SWAN-NECK - PRO	BZ501
	SWAN-NECK WASHER	
02.03.501	TAURUS BZ 38/501 WASHER	BZ501
	HANDLES AND SWITCHES	
HANDLE-PRO	TAURUS PRO BZ/TW/XP MIG TORCH HANDLE â€” RED	BZ/TW/XP PRO TORCHES
HANDLE-PRO-SW	TAURUS PRO BZ/TW/XP MIG TORCH HANDLE â€” TRIGGER SWITCH	BZ/TW/XP PRO TORCHES
02.08.R501	TAURUS BZ501 TORCH - AUTO HANDLE	BZ501





POWER CABLES

Taurus power cables are manufactured from high-quality copper to the correct torch amperage specification. The Taurus power cable delivers current, shielding gas and welding wire to the front tip of the MIG torch. If the power cable is water cooled, it will also allow water to flow through to the conductor tube for enhanced cooling.



OUTER LINERS

The Taurus outer liner fits inside the power cable. A suitable inner liner is inserted into the power cable and is the guide for the welding wire to the front of the torch.

PRODUCT CODE	DESCRIPTION	TORCH
	POWER CABLES	
02.20.25.4	TAURUS BZ25 POWER CABLE ASSEMBLY X 4M	BZ25
02.20.36.4	TAURUS BZ36 POWER CABLE ASSEMBLY X 4M	BZ46
02.20.40.4	TAURUS BZ40 POWER CABLE ASSEMBLY X 4M	BZ40
02.24.501.3	TAURUS BZ501 WATER POWER CABLE X 3M	BZ501
02.24.501.4	TAURUS BZ501 WATER POWER CABLE X 4M	BZ501
02.24.501.5	TAURUS BZ501 WATER POWER CABLE X 5M	BZ501
	OUTER LINERS	
02.21.501.3	TAURUS BZ501 OUTER LINER - 3M	BZ501
02.21.501.4	TAURUS BZ501 OUTER LINER - 4M	BZ501
02.21.501.5	TAURUS BZ501 OUTER LINER - 5M	BZ501



CANVAS SHEATHING OUTER COVERS

The Taurus canvas sheathing outer cover is manufactured from rubber-reinforced canvas. The cover is heat resistant and protects the welding torch cable and hose as well as machine inter-connecting cables from friction and spatter damage.

RUBBER SHEATHING OUTER COVERS

The Taurus rubber sheathing outer cover is manufactured from high-quality, anti-corrosive, fire and wear resistant rubber. It protects the welding torch cable and hose from damage.




BRAIDED HOSES

Taurus braided hoses are used with MIG and TIG torches. Blue and red hoses are usually used for water transportation in water-cooled torches and the black hoses for gas in both air-cooled and water-cooled torches.

PRODUCT CODE	DESCRIPTION	LENGTH	TORCH
CANVAS SHEATHING OUTER COVERS			
VA.PR.25.27	TAURUS CANVAS SHEATHING (26 X 28)	PER METER	BZ15 + BZ25
VA.PR.45.49	TAURUS CANVAS SHEATHING (45 X 49)	PER METER	BZ36 + BZ40
VA.PR.51.55	TAURUS CANVAS SHEATHING (51 X 55)	PER METER	BZ501 + INTERCONNECTION CABLE
RUBBER SHEATHING OUTER COVERS			
VAGD2123	TAURUS OUTER SHEATHING RUBBER (WP17)	4m + 8m	WP9 + WP17
VAGD2628	TAURUS OUTER SHEATHING RUBBER (WP26)	4m + 8m	WP18 + WP26 + BZ15 + BZ25
PRODUCT CODE	DESCRIPTION	LENGTH	DIAMETER
BRAIDED HOSES			
VAGH38NB	TAURUS HOSE BRAIDED GAS BLACK (3MM X 8MM)	PER METER	3 x 8
VAGH58B	TAURUS HOSE BRAIDED GAS BLUE (5MM X 8MM)	PER METER	5 x 8
VAGH58NB	TAURUS HOSE BRAIDED GAS BLACK (5MM X 8MM)	PER METER	5 x 8
VAGH58R	TAURUS HOSE BRAIDED GAS RED (5MM X 8MM)	PER METER	5 x 8

TAURUS TW MIG TORCH DIAGRAM

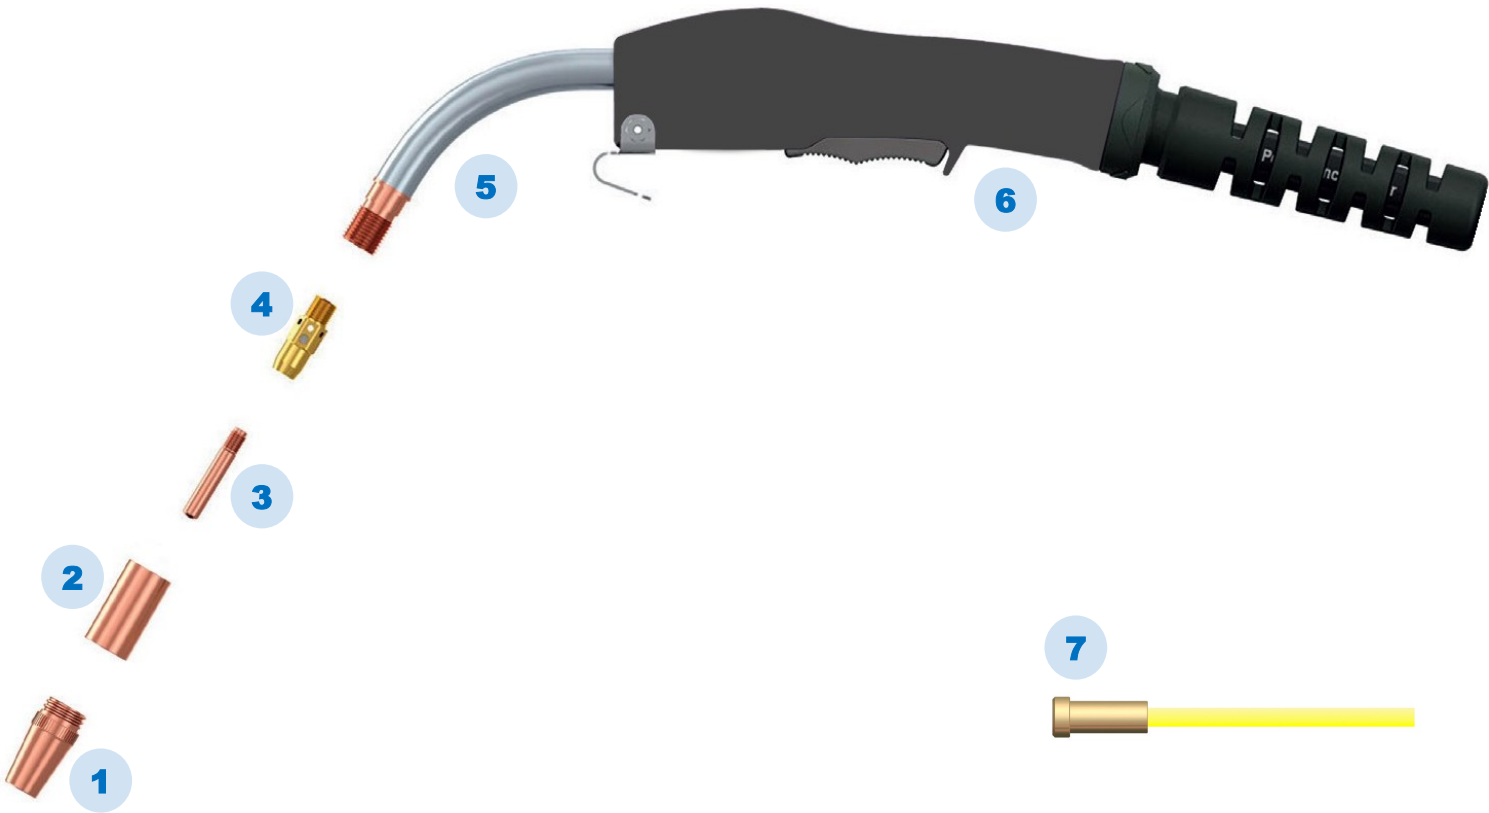

ITEM NUMBER	DESCRIPTION
1	OUTER NOZZLE
2	NOZZLE INSULATOR
3	CONTACT TIP
4	TIP ADAPTOR
5	CONDUCTOR TUBE
6	TORCH HANDLE AND SWITCH
7	LINER



TAURUS PRO TW MIG TORCHES



Taurus Pro TW MIG torches are precision engineered and manufactured from high-quality material offering the user a superior, well-designed, comfortable-to-use product which improves user performance. Nozzles are manufactured from copper enhancing longevity and superior performance. Contact tips are manufactured from a high-quality, harder than normal copper alloy which delivers excellent conductivity. The conductor tube is durable, robust and is manufactured from a high temperature resistant material reducing the risk of shorting. The torches are fitted with euro connectors which is compatible with most MIG welding machines.

General guidelines to assist with the selection of a MIG torch:

- Ensure the torch length is appropriate for the required welding operation.
- Confirm that the torch connection will fit to the welding machine.
- Ensure the correct sized tip and liner is used for the welding wire size.
- The appropriate liner should be used for the filler-wire material type.
- Ensure that the torch amperage is sufficient for the application.
- Confirm that the duty cycle of the MIG torch selected is suitable for the application.

PRODUCT CODE	DESCRIPTION	TORCH	LENGTH
T4E.4M	TAURUS PRO TW4 MIG TORCH X 4M	TW#4	4m
T4E.5M	TAURUS PRO TW4 MIG TORCH X 5M	TW#4	5m
T5E.4M	TAURUS PRO TW5 MIG TORCH X 4M	TW#5	4m
T5E.5M	TAURUS PRO TW5 MIG TORCH X 5M	TW#5	5m





NOZZLE INSULATOR



NOZZLE

NOZZLES AND NOZZLE INSULATORS

The Taurus TW MIG nozzle insulator and nozzle is a two piece set that is precision engineered from high quality copper for longevity and superior performance. The nozzle insulator is used to insulate the conduct tube from the outer nozzle. The outer nozzle is used to keep the gas at the weld puddle. If the nozzle builds up from spatter or gets damaged due to miss-use, wear and tear or overheating, it can affect the shielding process cause the shielding process resulting in poor welding, lack of penetration and increased spatter. To clean the nozzle, you can remove it from the MIG torch and gently use a wire brush to clean the spatter build-up. Taurus anti-spatter silicon spray can be applied to the nozzle making spatter removal easier.



MOD 4



MOD 5

TIP ADAPTORS WITH GAS DIFFUSER

The Taurus TW tip adaptor holds the contact tip and provides gas flow to the weld pool. It's a tip adaptor and gas diffuser combined as one unit.

PRODUCT CODE	DESCRIPTION		TORCH
01.24CT62	TWO PIECE NOZZLES TAURUS TW NOZZLE MOD 4 - 16MM		TW#4
01.25CT62	TAURUS TW NOZZLE MOD 5 - 16MM		TW#5
01.34CT	TWO PIECE NOZZLE INSULATORS TAURUS TW NOZZLE INSULATOR MOD 4		TW#4
01.35CT	TAURUS TW NOZZLE INSULATOR MOD 5		TW#5
01.75	SLIP ON NOZZLE INSULATORS TAURUS TW MOD 5 INSULATION		TW#5
PRODUCT CODE	DESCRIPTION	CONTACT TIP	TORCH
01.54A	TAURUS TW MOD 4 GAS DIFFUSER	M6	TW#4
01.55	TAURUS TW MOD 5 GAS DIFFUSER	M8	TW#5





Taurus TW contact tips are manufactured from a hard and high-conductivity copper alloy which means less frequent replacements which result in savings on welders' downtimes and on consumables. Contact tips guide the welding wire and transfer the current from the conductor tube through the MIG wire to the work piece. In order to ensure the best welding performance, it is important to select the correct size welding tip. An incorrect tip size can lead to problems such as micro-arcing, overheating, friction and wire jamming all resulting in wire burn-back.

PRODUCT CODE	DESCRIPTION	TORCH	SIZE (mm)
TW#4 CONTACT TIPS			
01.14H30	TAURUS TW CONTACT TIP MOD 2 / 4 - 0.8MM	TW#4	0.8
01.14H35	TAURUS TW CONTACT TIP MOD 2 / 4 - 0.9MM	TW#4	0.9
01.14H40	TAURUS TW CONTACT TIP MOD 4 - 1.0MM	TW#4	1.0
01.14H45	TAURUS TW CONTACT TIP MOD 4 - 1.2MM	TW#4	1.2
01.14H52	TAURUS TW CONTACT TIP MOD 4 - 1.4MM	TW#4	1.4
01.14H116	TAURUS TW CONTACT TIP MOD 4 - 1.6MM	TW#4	1.6
TW#5 CONTACT TIPS			
01.15H35	TAURUS TW CONTACT TIP MOD 5 - 0.9MM	TW#5	0.9
01.15H40	TAURUS TW CONTACT TIP MOD 5 - 1.0MM	TW#5	1.0
01.15H45	TAURUS TW CONTACT TIP MOD 5 - 1.2MM	TW#5	1.2
01.15H52	TAURUS TW CONTACT TIP MOD 5 - 1.4MM	TW#5	1.4
01.15H116	TAURUS TW CONTACT TIP MOD 5 - 1.6MM	TW#5	1.6



LINERS

The Taurus TW liner is the guide for the welding wire through the MIG torch to the contact tip. The correct liner is required to ensure smooth, consistent wire feed and high-quality welding. Several criteria such as wire thickness, torch length and type of wire material should be considered when selecting the correct liner. When the internal diameter of the liner is too small for the wire being used, wire feed will be affected. When the internal diameter of the liner is too large for the wire being used, the wire could fold back. When thinner wire is used, erratic feeding or even blockages can occur. Liners need to be cut to the correct length when installed. Wire feeding problems can result from liners cut too short. It should fit tightly against the contact tip. The correct liner should be selected for the type of welding wire used - steel liners for mild steel wires. Aluminium alloy wires require smoother teflon liners and for stainless steel wires harder carbon-teflon liners are required. Regular cleaning of liners is necessary to prevent clogging. Due to friction, liners do wear out and should be replaced periodically.

LINER NUT

The TW liner nut secures the liner to the torch.

CODE	LINER TYPE	LENGTH	WIRE SIZE	WIRE TYPE	TW#4	TW#5
01.44.116	STEEL	4.5m	1.2 - 1.6	STEEL WIRES	●	●
01.44.116.5	STEEL	5.4m	1.2 - 1.6	STEEL WIRES	●	●

- Solid means recommended
- Clear means compatible

PRODUCT CODE	DESCRIPTION	LINER TYPE	LENGTH (m)	WIRE SIZE (mm)
STEEL LINERS				
01.44.116	TAURUS YELLOW TW LINER MOD 4/5 1-1.6MM 4.5M E/END	STEEL LINER	4.5	1.2 - 1.6
01.44.116.5	TAURUS YELLOW TW LINER MOD 4/5 1-1.6MM 5.4M E/END	STEEL LINER	5.4	1.2 - 1.6
LINER NUT				
01.20.01	TAURUS LINER NUT FOR TWECO - M12	TORH ADAPTOR TYPE TWECO	-	-



TAURUS TW CONDUCTOR TUBES & TORCH HANDLES & SWITCHES



CONDUCTOR TUBES

The Taurus TW conductor tube is the extended section protruding from the torch handle on which the contact tip and gas nozzle are mounted. The conductor tube delivers the electrical current, filler wire, and shielding gas on to the weld pool. Conductor tubes are also known as swan necks or goose necks.




MIG TORCH HANDLE

The Taurus TW MIG torch handle is manufactured from fully insulated nylon material for heavy-duty welding. The switch is long lasting and designed for frequent activation.

PRODUCT CODE	DESCRIPTION	TORCH
01.64A60-PRO	CONDUCTOR TUBES TAURUS PRO TW4 CONDUCTOR TUBE	TW#4
01.65.60-PRO	TAURUS PRO TW5 CONDUCTOR TUBE	TW#5
	HANDLES AND SWITCHES	
HANDLE-PRO	TAURUS PRO BZ/TW/XP MIG TORCH HANDLE - RED	BZ/TW/XP PRO TORCHES
HANDLE-PRO-SW	TAURUS PRO BZ/TW/XP MIG TORCH HANDLE - TRIGGER SWITCH	BZ/TW/XP PRO TORCHES



XP MIG TORCH DIAGRAM

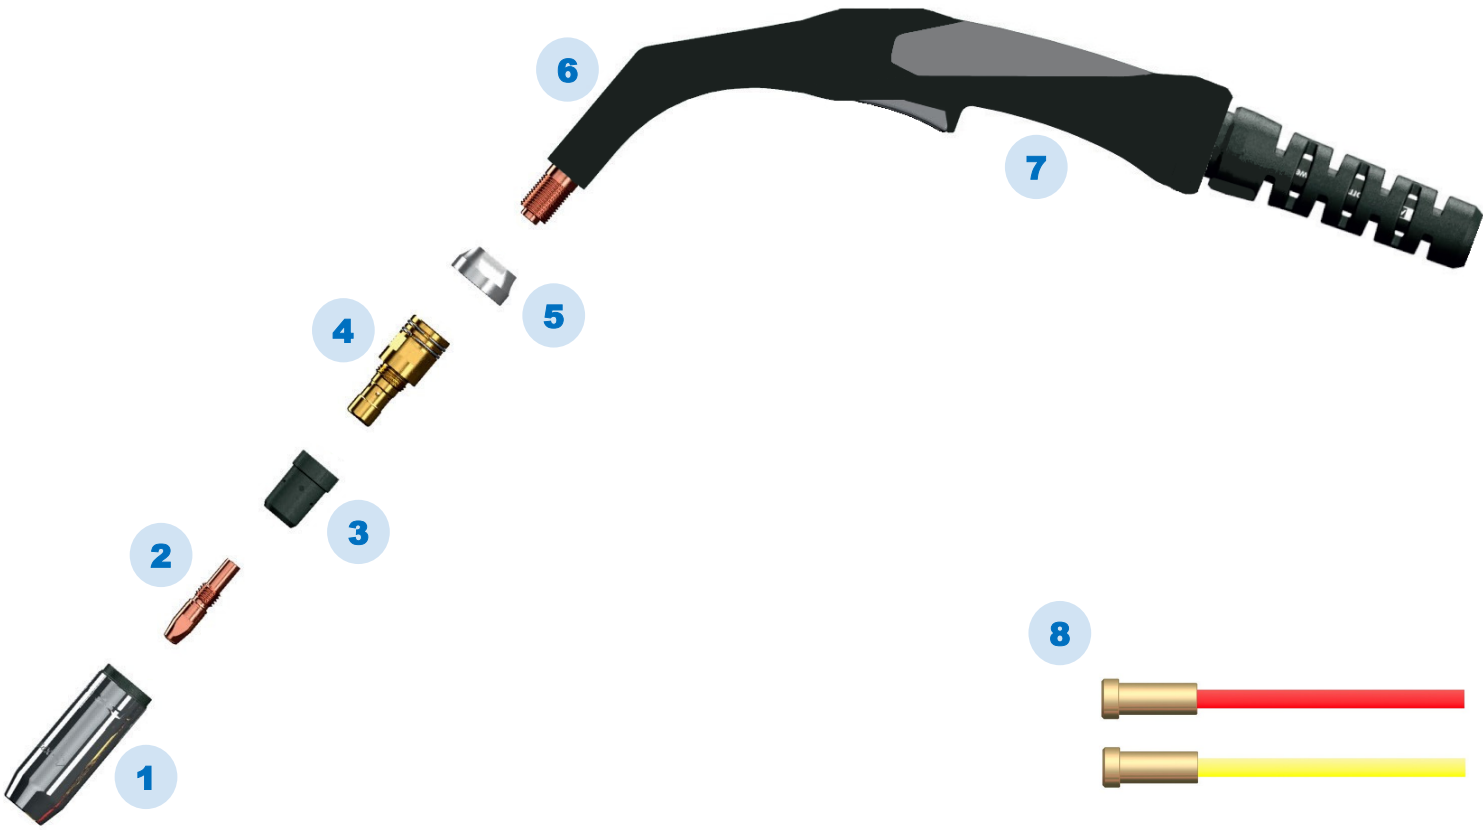

ITEM NUMBER	DESCRIPTION
1	NOZZLE
2	CONTACT TIP
3	GAS DIFFUSER
4	HEAD ASSEMBLY
5	HEAT SHIELD
6	CONDUCTOR TUBE
7	TORCH HANDLE AND SWITCH
8	LINER



TAURUS XP MIG TORCHES



The Taurus XP MIG torch is designed and manufactured for professional use. Serving performance, comfortable handling and service life, is manufactured from high-quality material. The torch has a high duty cycle of 80% and its patented gas-flow technology ensures a cooler neck and tip which, in turn, saves up to 70% on consumables and a reduction of welder's downtime by up to 50%.

PRODUCT CODE	DESCRIPTION	LENGTH	AMPERAGE	TORCH
XP200A-30E	TAURUS PRO XP200A MIG TORCH X 3M	3m	200A	XP 200A
XP200A-40E	TAURUS PRO XP200A MIG TORCH X 4M	4m	200A	XP 200A
XP300A-40E	TAURUS PRO XP300A MIG TORCH X 4M	4m	300A	XP 300A
XP350A-40E	TAURUS PRO XP350A MIG TORCH X 4M	4m	350A	XP 350A
XP400A-40E	TAURUS PRO XP400A MIG TORCH X 4M	4m	400A	XP 400A
XP450A-40E	TAURUS PRO XP450A WATERCOOLED MIG TORCH X 4M	4m	450A	XP 450W



TAURUS XP CONTACT TIPS



CONTACT TIPS

Taurus XP contact tips are manufactured from a hard and high-conductivity copper alloy which means less frequent replacements which result in savings on welders' downtimes and on consumables. Contact tips guide the welding wire and transfer the current from the conductor tube (swan neck) through the MIG wire to the work piece. In order to ensure the best welding performance, it is important to select the correct size welding tip. An incorrect tip size can lead to problems such as micro-arcing, overheating, friction and wire jamming all resulting in wire burn-back.

NOZZLES

Taurus XP MIG nozzles are precision engineered and have a thicker wall thickness resulting in superior performance and longevity. The nozzle, also known as a shroud, is used to keep the gas at the weld puddle. When the nozzle spatter builds up or if the nozzle becomes damaged due to miss use, wear and tear or overheating, it can cause the shielding process to be uncontrolled which may result in poor welding, lack of penetration and increased spatter. Build-up of spatter between the contact tip and the nozzle can result in shorting. The nozzle cleaning process can be facilitated by using silicon anti spatter spray which makes removal of the spatter easier. The nozzle can also be removed from the MIG torch and a wire brush used to clean off the spatter build-up.

PRODUCT CODE	DESCRIPTION	THREAD	TORCH
XP2003-08	TAURUS XP CONTACT TIP M8 0.8MM 200-300A	M8	XP8 200A - 300A
XP2003-09	TAURUS XP CONTACT TIP M8 0.9MM 200-300A	M8	XP8 200A - 300A
XP2003-10	TAURUS XP CONTACT TIP M8 1.0MM 200-300A	M8	XP8 200A - 300A
XP2003-12	TAURUS XP CONTACT TIP M8 1.2MM 200-300A	M8	XP8 200A - 300A
XP3003-09	TAURUS XP CONTACT TIP M10 0.9MM 300-450A	M10	XP8 300A - 450A
XP3003-10	TAURUS XP CONTACT TIP M10 1.0MM 300-450A	M10	XP8 300A - 450A
XP3003-12	TAURUS XP CONTACT TIP M10 1.2MM 300-450A	M10	XP8 300A - 450A
XP3003-14	TAURUS XP CONTACT TIP M10 1.4MM 300-450A	M10	XP8 300A - 450A
XP3003-16	TAURUS XP CONTACT TIP M10 1.6MM 300-450A	M10	XP8 300A - 450A
PRODUCT CODE	DESCRIPTION	STYLE	TORCH
XP2002-16	TAURUS XP CONICAL NOZZLE 16MM 200-300A	CONICAL	XP8 200A - 300A
XP3002-13	TAURUS XP TAPERED NOZZLE 13MM	TAPERED	XP8 300A - 450A
XP3002-16	TAURUS XP CONICAL NOZZLE 16MM 300-450A	CONICAL	XP8 300A - 450A
XP3002-16L	TAURUS XP CONICAL LONG NOZZLE 16MM 300-450A	CONICAL	XP8 300A - 450A



TAURUS XP HEAD ASSEMBLY, GAS DIFFUSER & HEAT SHIELD




HEAD ASSEMBLY / TIP ADAPTOR

The Taurus XP head assembly holds the contact tip and the gas diffuser in place.



GAS DIFFUSER

The Taurus XP gas diffuser provides gas flow to the weld pool.




HEAT SHIELD

The Taurus XP heat shield reduces the heat-flow from the nozzle reaching the conductor tube (swan neck).

PRODUCT CODE	DESCRIPTION	CONTACT TIP THREAD	TORCH
HEAD ASSEMBLY			
XP2005	TAURUS XP HEAD ASSEMBLY M8 200/300A	M8	XP 200A - 300A
XP3005	TAURUS XP HEAD ASSEMBLY M10 200/300A	M10	XP 200A - 300A
XP3505	TAURUS XP HEAD ASSEMBLY M10 350/400/450A	M10	XP 200A - 300A
HEAT SHIELD			
XP2006A	TAURUS XP ALUMINIUM HEAT SHIELD M8 S 200/300A	M8	XP 200A - 300A
XP2006B	TAURUS XP MOULD HEAT SHIELD M8 S 200-300A	M8	XP 200A - 300A
XP3506A	TAURUS XP HEAT SHIELD ALUMINIUM WITH BLACK INSULATOR M10 350-450A	M10	XP 350A - 450A
XP3506B	TAURUS XP MOULDED HEAT SHIELD M10 350-450A	M10	XP 350A - 450A
GAS DIFFUSER			
XP2004B	TAURUS XP GAS DIFFUSER M8 HEAD 200/300A	M8	XP 200A - 300A
XP2004C	TAURUS XP GAS DIFFUSER CERAMIC M8 200/300A	M8	XP 200A - 300A
XP3004B	TAURUS XP GAS DIFFUSER M10 HEAD 350-450A	M10	XP 350A - 450A
XP3004C	TAURUS XP GAS DIFF CERAMIC M10 350-450A	M10	XP 350A - 450A



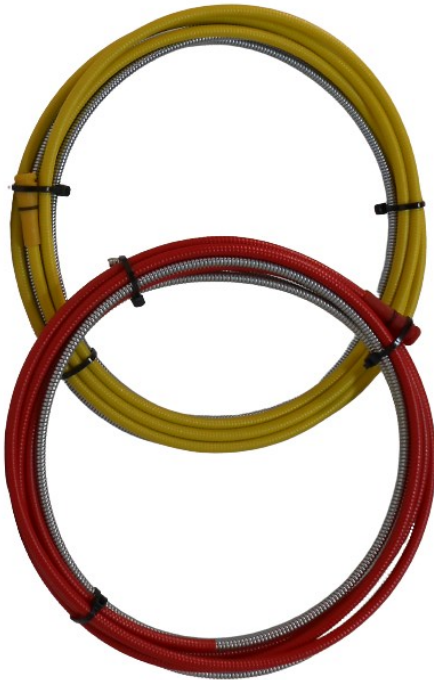

LINERS

The Taurus XP liner is the guide for the welding wire through the MIG torch to the contact tip. The correct liner is required to ensure smooth, consistent wire feed and high-quality welding. Several criteria such as wire thickness, torch length and type of wire material should be considered when selecting the correct liner. When the internal diameter of the liner is too small for the wire being used, wire feed will be affected. When the internal diameter of the liner is too large for the wire being used, the wire could fold back. When thinner wire is used, erratic feeding or even blockages can occur. Liners need to be cut to the correct length when installed. Wire feeding problems can result from liners cut too short. It should fit tightly against the contact tip. The correct liner should be selected for the type of welding wire used - steel liners for mild steel wires. Aluminium alloy wires require smoother teflon liners and for stainless steel wires harder carbon-teflon liners are required. Regular cleaning of liners is necessary to prevent clogging. Due to friction, liners do wear out and should be replaced periodically.

CODE	LINER TYPE	LENGTH	WIRE SIZE	WIRE TYPE	200A	300A	350A	400A
XP2024-09.40	STEEL - PVC COATED	3m	1.0 - 1.2	STEEL WIRES	●	●		
XP2024-12.30	STEEL - PVC COATED	3m	1.0 - 1.2	STEEL WIRES	●	●		
XP2024-12.40	STEEL - PVC COATED	4m	1.0 - 1.2	STEEL WIRES	●	●		
XP3524-12-40	STEEL - PVC COATED	4m	1.0 - 1.2	STEEL WIRES			●	●
XP3524-12-50	STEEL - PVC COATED	5m	1.0 - 1.2	STEEL WIRES			●	●
XP3524-16-40	STEEL - PVC COATED	4m	1.2 - 1.6	STEEL WIRES			●	●
XP3524-16-50	STEEL - PVC COATED	5m	1.2 - 1.6	STEEL WIRES			●	●

● Solid means recommended

○ Clear means compatible

PRODUCT CODE	DESCRIPTION	LINER TYPE	LENGTH (M)	TORCH
LINER				
XP2024-09.40	TAURUS BLUE XP LINER CONDUIT 0.6-0.8 X 4M	PVC STEEL LINER	4	XP8 200A - 300A
XP2024-12.30	TAURUS RED XP LINER CONDUIT 1.0-1.2 X 3M	PVC STEEL LINER	3	XP8 200A - 300A
XP2024-12.40	TAURUS RED XP LINER CONDUIT 1.0-1.2 X 4M	PVC STEEL LINER	4	XP8 200A - 300A
XP3524-12-40	TAURUS RED XP LINER CONDUIT 1.0-1.2 X 4M	PVC STEEL LINER	4	XP8 350A - 400A
XP3524-12-50	TAURUS RED XP LINER CONDUIT 1.0-1.2 X 5M	PVC STEEL LINER	5	XP8 350A - 400A
XP3524-16-40	TAURUS YELLOW XP LINER CONDUIT 1.6 X 4M	PVC STEEL LINER	4	XP8 350A - 400A
XP3524-16-50	TAURUS YELLOW XP LINER CONDUIT 1.6 X 5M	PVC STEEL LINER	5	XP8 350A - 400A
LINER NUT				
XP2026	TAURUS XP LINER RETAINING NUT 200-450A	TORCH ADAPTOR TYPE EURO	-	XP8 200A - 400A



TAURUS XP CONDUCTOR TUBE




CONDUCTOR TUBES

The Taurus XP conductor tube is the extended section protruding from the torch handle on which the head assembly, contact tip and gas nozzle are mounted. The conductor tube delivers the electrical current, filler wire, and shielding gas on to the weld pool.

PRODUCT CODE	DESCRIPTION	TORCH
	CONDUCTOR TUBES	
XP2001	TAURUS XP SWAN NECK 200A	XP 200A
XP3501	TAURUS XP SWAN NECK 350A	XP 350A



TAURUS PP36 PUSH-PULL MIG TORCH

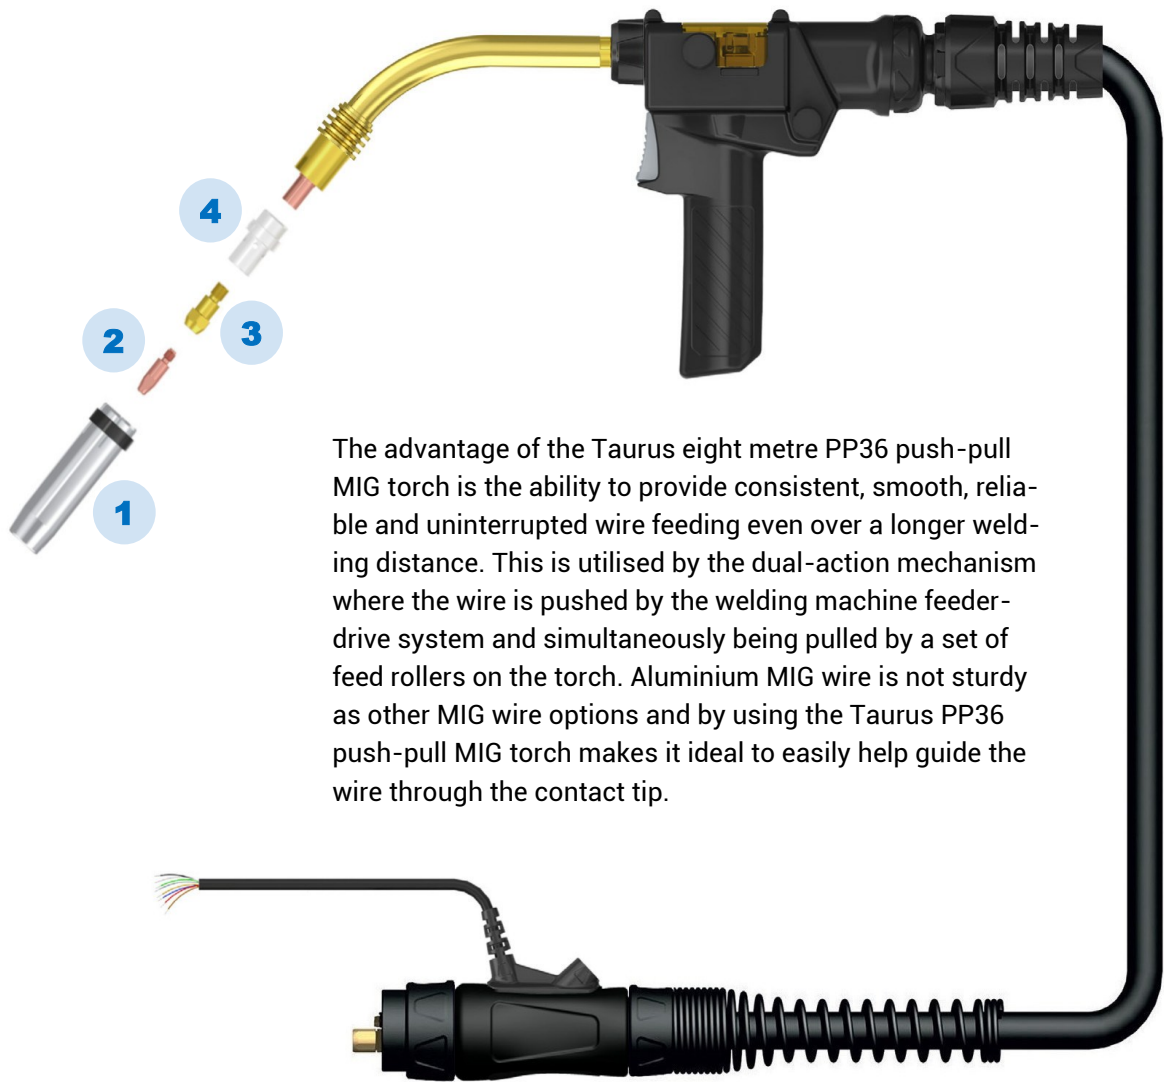

The advantage of the Taurus eight metre PP36 push-pull MIG torch is the ability to provide consistent, smooth, reliable and uninterrupted wire feeding even over a longer welding distance. This is utilised by the dual-action mechanism where the wire is pushed by the welding machine feeder-drive system and simultaneously being pulled by a set of feed rollers on the torch. Aluminium MIG wire is not sturdy as other MIG wire options and by using the Taurus PP36 push-pull MIG torch makes it ideal to easily help guide the wire through the contact tip.

PRODUCT CODE	DESCRIPTION	ITEM #
PPA3645-80E	TORCH	
	TAURUS PP36 PUSH PULL TORCH X 8M - EURO - BENT NECK	-
	TORCH CONSUMABLES	
	USE BZ36 TORCH CONSUMABLES	1 + 2 + 3 + 4





The Taurus MIG welding pliers is a multi-purpose tool designed for complementing welding operations. It is adapted to various applications and will save time and increase productivity. The handle/jaw is spring-loaded for easy opening and closing. It serves the purpose for the removal and installation of contact tips and nozzles and for the removal of spatter from the inside, the outside and from the nozzle end.

FEATURES AND BENEFITS

- Drawing out MIG wire.
- Cutting MIG wire.
- Removal and installation of contact tips.
- Removal and installation of nozzles (shrouds).
- Removal of spatter from inside and outside the nozzle.
- Gentle hammering.
- Spring loaded handle/jaw for easy opening and closing.

PRODUCT CODE	DESCRIPTION
MWP001	TAURUS MIG WELDING PLIERS

MIG TORCHES AND ACCESSORIES



BROCHURES AVAILABLE

SAFETY EQUIPMENT FOR PPE & ONSITE

WELDING EQUIPMENT & ACCESSORIES

GAS EQUIPMENT & ACCESSORIES

PLASMA TORCH & ACCESSORIES

WELDING & PLASMA MACHINES

MIG TORCH & ACCESSORIES

TIG TORCH & ACCESSORIES

WELDING CONSUMABLES